

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
16 December 2004 (16.12.2004)

PCT

(10) International Publication Number
WO 2004/109004 A1

(51) International Patent Classification⁷: D06F 37/04,
58/02

(21) International Application Number:
PCT/KR2004/001316

(22) International Filing Date: 3 June 2004 (03.06.2004)

(25) Filing Language: Korean

(26) Publication Language: English

(30) Priority Data:
10-2003-0036393 5 June 2003 (05.06.2003) KR
10-2004-0003532 17 January 2004 (17.01.2004) KR

(71) Applicant (for all designated States except US): LG
ELECTRONICS INC. [KR/KR]; 20, Yoido-dong,
Youngdungpo-gu, Seoul 150-721 (KR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): HAN, In Hee

[KR/KR]; Anmin-dong, Changwon-si, Gyeongsang-
nam-do, 641-150 (KR). LEE, Soon Jo [KR/KR]; Lotte
Apt., 212-210, Yonho-dong, Changwon-si, Gyeongsang-
nam-do 641-784 (KR).


(74) Agents: BAHNG, Hae Cheol et al.; KBK & AS-
SOCIATES, 15th Floor Yo Sam Building, 648-23,
Yeoksam-dong, Kangnam-gu, Seoul 135-080 (KR).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,
MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: DRUM FOR WASHER AND DRYER

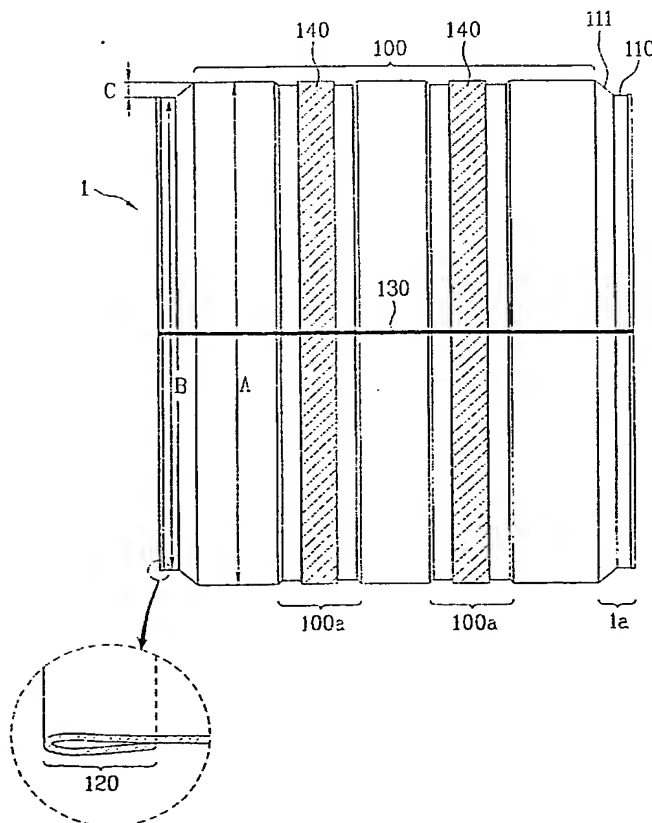

(57) **Abstract** Drum (1) for a washing machine or
a dryer including a cylindrical metal body part (100),
reduced parts (110) at opposite ends of the body part,
each having a diameter smaller than a diameter of the
body part, and bent parts (120) each having a folded
edge of the reduced part, thereby providing a drum that
preventing occurrence of vibration and noise.

WO 2004/109004 A1